# Hughes KNITTING BOOK

FEATURING MENS DESIGNS



**BOUCLE, KWICKNIT, BULKYKNIT, KOOBA TWINPRUFE Double Crepe, Crochet, 4 Ply & ORLON** 

PRICE: 1/9





### -DESIGN No. 983 -

(Illustrated Opposite)

# HUGHES TWINPRUFE DOUBLE CREPE OR

# **HUGHES KOOBA FINGERING**

MATERIALS REQUIRED:

Double Crepe: 15 (16-17-19) Balls. Kooba: See notes on equivalents, Page 3. 1 pair No. 10 needles and 1 set of 4 No. 12 needles.

MEASUREMENTS: Length from top of shoulder  $23\frac{3}{4}$ " (24"-24\frac{1}{4}"-24\frac{1}{2}"). Chest 38" (40"-42"-44"). Length of sleeve seam 19" (20"-20"-20").

**TENSION:**  $6\frac{1}{2}$  sts., 1".  $8\frac{1}{2}$  rows, 1".

BACK: Using No. 12 needles, cast on 126 (132-138-144) sts. Work in rib of K1, P1 for  $3\frac{1}{2}$ ". Change to No. 10 needles and work in st.st. When work measures 15" (15"-15"-15"), shape armholes by casting off 4 (4-5-6) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 4 (5-5-5) rows, then every 2nd row 4 (5-5-5) times. When armholes measure  $8\frac{3}{4}$ " (9"- $9\frac{1}{4}$ "- $9\frac{1}{2}$ "), shape shoulders by casting off 8 (11-7-9) sts. at the beginning of the next 8 (6-10-8) rows. Cast off remaining sts. loosely.

FRONT: Work the same as for back until

armholes measure  $4\frac{1}{4}$ "  $(4\frac{1}{2}$ "  $-4\frac{3}{4}$ " -5").

Next Row: K42 (43-45-46) sts., (leave on a spare needle), cast off loosely 18 (18-18-20)

sts., K42 (43-45-46) sts.

Continue on last 42 (43-45-46) sts. and K2 tog. at neck edge of the next 5 rows, then every 2nd row until decreased to 32 (33-35-36) sts. When armhole measures  $6\frac{1}{2}$ "  $(6\frac{3}{4}$ " -7"  $-7\frac{1}{4}$ "), cast off. Join wool at neck edge and work

other side to correspond.

SLEEVES: Using No. 12 needles, cast on 66 (70-72-76) sts. Work in rib of K1, P1 for 3". Change to No. 10 needles and work in st.st., increasing 1 st. each end of every 8th row until increased to 100 (104-106-110) sts. When sleeve seam measures 19" (20"-20"-20") or required length, K2 tog. each end of every 2nd row until decreased to 60 (60-60-60) sts., then every row until decreased to 32 (32-32-

Next Row: Cast off 16 sts., then continue on remaining 16 sts. and increase 1 st. at centre edge of sleeve every 10th (12th-8th-8th) row 4 (3-5-4) times. Continue without shaping until long enough to fit across one side of front from shoulder to neck edge. Cast off. Work other sleeve to correspond, casting off 16 sts. at top of sleeve at opposite end.

NECKBAND: Join sleeves to back and front having the straight edge at top of sleeve to fit front of pullover and the shaped edge on back shoulder. With right side of work towards you, using 4 No. 12 needles, pick up and K about 144 (146-148-150) sts. around neck. Work in rounds in rib of K1, P1 for 1". Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Sew up side and sleeve seams.

# ABBREVIATIONS

K. Knit.

P. Purl.

St. Stitch.

Tog. Together.
Sl. Slip.
Wl. Fwd. Wool forward.

W.R.N. Wool round needle.

S. Smoke.

B. Black.

R. Red.

St.St. Stocking Stitch. (K 1 row, P 1 row alternately.)

Garter St. K every row.

Moss St. With an even number of sts., work as follows:-

1st Row: \* K1, P1, repeat from \* to end. 2nd Row: \* P1, K1, repeat from \* to end. Repeat these 2 rows.

With an uneven number of sts., work as

follows:-

K1. \* P1. K1. repeat from \* to end. Repeat this row throughout.

# **HUGHES KNITTING WOOL EQUIVALENTS**

HUGHES Orlon, Crochet and 3-Ply Crepe are interchangeable, and may be

knitted to the same pattern.

**HUGHES** Kooba and Double Crepe may be knitted to the same pattern, but when knitting Kooba to a Double Crepe pattern, two extra balls will be required. When knitting Double Crepe to a Kooba pattern, two balls less are required.

HUGHES Boucle and Kwicknit may be knitted to the same pattern, but when knitting Boucle to a Kwicknit pattern, three extra balls will be required. When knitting Kwicknit to a Boucle pattern, three balls less are required.

Quantities stipulated above apply to a normal adult garment with long sleeves.

# -DESIGN No.

(Illustration on Front Cover)

# **HUGHES KOOBA FINGERING** OR

HUGHES TWINPRUFE DOUBLE CREPE MATERIALS REQUIRED:

Kooba: 15 (15-16) Balls Smoke. 1 (1-1) Ball Black. 2 (2-2) Balls Red.

Double Crepe: See notes on equivalents, Page 3.

2 pairs needles Nos. 12 and 9.

MEASUREMENTS: Length from top of shoulder 24" (244"-241"). Chest 38" (40"-42"). Length of sleeve seam 19" (19"- $19\frac{1}{2}''$ ).

**TENSION:** 6 sts., 1". 8 rows, 1".

Commence at cuff. Using No. 12 needles and S. wool, cast on 68 (68-70) sts. Work in rib of K1, P1 for 3". Change to No. 9 needles and work 4 rows S., then work as follows, increasing 1 st. each end of every 6th row.

1st Row: Using B. wool, K. 2nd Row: Using B. wool, P.

3rd Row: Using S. wool, K. 4th Row: Using S. Wool, P.

5th Row: Using R. wool, K.

6th Row: Using R. wool, P.

Repeat 5th and 6th rows.

9th Row: Using S. wool, K. 10th Row: Using S. wool, P.

11th Row: Using B. wool, K. 12th Row: Using B. wool, P.

Repeat 9th, 10th, 7th, 8th, 5th, 6th, 3rd, 4th, 1st and 2nd rows.

Continue in st.st. using S. wool, increase 1 st. each end of every 6th row until increased to 94 (94-100) sts. Continue increasing 1 st. each end of every 3rd row until increased to 134 (134-134) sts. When sleeve seam measures 19"  $(19''-19\frac{1}{2}'')$  (measured straight) and ending with a purl row, cast on 56 (58-60) sts.

WARNING

WARNING

The knitting instructions in this book have been worked out by experts using F. W. Hughes' knitting wool. Do not accept substitution. Only by using the wool specified and following the instructions and tension given can you assure the success of your garment.

Next Row: K123 (125-127) sts., (leave remaining 67 sts. on a spare needle). Increase into first st. to allow for shoulder seam, P122 (124-126) sts. Continue on these 124 (126-128) sts. for  $2\frac{1}{2}$ " (3"- $3\frac{1}{2}$ "). Now work the 22 rows of striped pattern. Continue in st.st. using S. wool, for  $8\frac{1}{2}$ " ( $8\frac{1}{2}$ "- $8\frac{1}{2}$ "), then work the 22 rows of pattern again. Continue using S. wool for  $2\frac{1}{2}$ " (3"- $3\frac{1}{2}$ "), leave these sts. on a spare needle and work the other side to correspond.

Next Row: Commencing with sts. left on spare needle, cast off 56 (58-60) sts., K66 (66-66),

(K2 tog.) twice, K to end of row.

Next Row: Cast off 56 (58-60) sts., P to end. Continue on these 134 (134-134) sts. and work to correspond with other sleeve, decreasing When sleeve seam instead of increasing. measures 16" (16"-16½") measured straight, change to No. 12 needles and work in rib of K1, P1 for 3". Cast off.

**NECKBANDS:** Join shoulder seams, leaving an 8½" opening for neck. With right side of work towards you, using 2 No. 12 needles and S. wool, pick up and K. about 60 sts. along front of neck. Work in st.st. for 1", increasing 1 st. each end of every 2nd row. Cast off loosely. Work back neckband to correspond with front. Press and stitch down on to wrong side.

BASOUE: Using No. 12 needles and S. wool, pick up and K about 114 (118-120) sts. along lower edge of front. Work in rib of K1, P1 for  $3\frac{1}{2}$ ". Cast off in ribbing. Work basque on back the same.

TO MAKE UP: Press with a warm iron and damp cloth. Sew up seams.

## CAUTION

When working Fair Isle or a pattern divisible by a large amount of sts., some sizes will necessitate commencing in the centre of a pattern. The sts. within the brackets are for 2nd and 3rd sizes. Where instructions read K0 (1-0) underline the size required and ignore all brackets until required size begins. This could read:-

> Knit 0 (1st size). Knit 1 (2nd size). Knit 0 (3rd size).



# -DESIGN No. 982-

HUGHES TWINPRUFE CROCHET OR HUGHES TWINPRUFE 3-PLY CREPE

MATERIALS REQUIRED: 8 (9) Balls.
1 pair No. 10 needles and 1 set of 4 No.
12 needles.

MEASUREMENTS: Length from top of shoulder 23¾" (24"). Chest 38" (40").

TENSION: 9 sts., 1". 11 rows, 1".

BACK: Using No. 12 needles, cast on 130 (138) sts. Work in rib of K1, P1 for  $3\frac{1}{2}$ ". Change to No. 10 needles, P10 (6), \* P twice into next st., P2 (2), repeat from \* to end. 170 (182) sts. Work in following pattern.

1st Row: P2, \* K10, P2, repeat from \* to

2nd Row: K2, \* P10, K2, repeat from \* to end.

Repeat 1st and 2nd rows twice.

7th Row: P2, \* sl. 2 sts. on to a spare needle and leave at back, K3, K the 2 sts. from spare needle, sl. 3 sts. on to a spare needle and leave in front, K2, K the 3 sts. from spare needle, P2, repeat from \* to end.

8th Row: Repeat 2nd row.

These 8 rows complete the pattern. Continue in pattern and when work measures 14" (14"), shape armholes by casting off 10 (12) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 6 (6) rows, then every 2nd row 6 (6) times. When armholes measure 93" (10"), shape shoulders by casting off 10 (11) sts. at the beginning of the next 8 (8) rows. Cast off.

FRONT: Work the same as for back to armholes

Next Row: Cast off 10 (12) sts., work 75 (79) sts., (leave remaining sts. on a spare needle). Continue on last 75 (79) sts. and K2 tog. at neck edge every 4th row, at the same time, K2 tog. at armhole edge of the next 6 (6) rows, then every 2nd row 6 (6) times. Continue to decrease 1 st. at centre front every 4th row until decreased to 40 (44) sts. When armhole measures 9¾ (10″), shape shoulder by casting off 10 (11) sts. at armhole edge every 2nd row 4 times. Join wool at centre front and work other side to correspond.

ARMBANDS: Join shoulder seams. With right side of work towards you, using No. 12 needles, pick up and K about 190 (196) sts. around armholes. Work in rib of K1, P1 for 1". Cast off in ribbing.

NECKBAND: With right side of work towards you, using 4 No. 12 needles, pick up and K about 200 (212) sts. around neck. Work in rounds in rib of K1, P1 for 1", decreasing 1 st. each side of "V" every round. Cast off in ribbing.

**TO MAKE UP:** Press with a warm iron and damp cloth. Sew up seams.



# -DESIGN No. 798-

HUGHES BOUCLE OR

HUGHES KWICKNIT MATERIALS REQUIRED:

Boucle: 13 (14-15-17) Balls. Kwicknit: See notes on equivalents, Page 3. 1 pair No. 8 needles and 1 set of 4 No. 11 needles. **MEASUREMENTS:** Length from top of shoulder  $24\frac{1}{2}$ "  $(24\frac{3}{4}$ "-25"- $25\frac{1}{4}$ "). Chest 38" (40"-42"-44").

**TENSION:**  $5\frac{1}{2}$  sts., 1". 8 rows, 1".

BACK: Using No. 11 needles, cast on 104 (110-116-122) sts. Work in rib of K1, P1 for  $3\frac{1}{2}$ ". Change to No. 8 needles and work in following pattern:—

# DESIGN No. 1162 PEACOCK FASHION FLECK

(Illustrated Opposite)

A simple yet smart design in Fashion Fleck featuring the "dropped shoulder" line.

Knit it in Peacock Blue, rich Braeburne Green—the green with a touch of Olive, or Black to mention just a few of the available shades, all with their fascinating multi-colour flecks.

MATERIALS REQUIRED: 21 (22-23) Balls.

1 pair No. 6 Needles and 1 set of 4 No. 10 needles.

**MEASUREMENTS:** Length from top of shoulder 22¾" (23"-23¼").

Bust 34" (36"-38").

Length of sleeve seam  $18\frac{1}{2}"$  ( $18\frac{1}{2}"-19"$ ).

**TENSION:**  $4\frac{1}{2}$  sts. 1".  $6\frac{1}{2}$  rows 1".

BACK: Using No. 10 needles, cast on 96 (104-108) sts. Work in rib of K1, P1 for 1½". Change to No. 6 needles and decrease as follows:—P0 (4-8), \* P2 tog., P4 (3-3), repeat from \* to end. 80 (84-88) sts. Work in st.st. and when work measures 15" (15"-15"), shape armholes by K2 tog. each end of every row 5 (5-5) times. When armholes measure 7½" (7½"-7¾"), shape shoulders by K2 tog. each end of the next 4 rows. Cast off 7 (8-8) sts. at the beginning of the next 2 rows. Cast off 7 (7-8) sts. at the beginning of the next 4 rows. Cast off.

FRONT: Work same as for back to armholes.

Next Row: K2 tog., K38 (40-42), leave remaining 40 (42-44) sts. on a spare needle.

Continue on last 39 (41-43) sts. and K2 tog. at neck edge on the next and every following 4th row, at the same time, K2 tog. at armhole edge of the next 4 (4-4) rows. Continue to

decrease 1 st. at neck edge every 4th row until decreased to 25 (26-28) sts. When armhole measures  $7\frac{1}{4}$ " ( $7\frac{1}{2}$ "- $7\frac{3}{4}$ "), K2 tog. at armhole edge of the next 4 rows. Cast off 7 (8-8) sts. at the armhole edge of the next row. Cast off 7 (7-8) sts. at the armhole edge every 2nd row twice. Join wool at centre front and work other side to correspond.

SLEEVES: Using No. 10 needles, cast on 50 (54-56) sts. Work in rib of K1, P1 for 1½". Change to No. 6 needles and decrease as follows:—P2 (6-0) \* P2 tog., P6 (4-5), repeat from \* to end. 44 (46-48) sts. Work in st. st. increasing 1 st. each end of every 8th row until increased to 66 (68-70) sts. When sleeve seam measures 18" (18½"-19") or required length, K2 tog. each end of the next 5 (5-5) rows. Cast off.

NECKBAND: Join shoulder seams. With right side of work towards you, using 4 No. 10 needles, pick up and K about 144 (148-152) sts. around neck. Work in rib of K1, P1 for 1", decreasing 1 st. each side of "V" every round. Cast off in ribbing.

**TO MAKE UP:** Press with a warm iron and damp cloth. Stitch sleeves around armholes. Sew up seams.



# DESIGN No. 1170 PEACOCK FASHION FLECK

(See Page 10 for Instructions)

Raglan sleeves and a generous crew neck are featured in this stocking stitch twosome in Fashion Fleck.

Note the narrow basque and interesting treatment of the raglan shapings. This is a design which is quick and easy to knit and above all else . . . . smart.



# DESIGN No. 1163 PEACOCK CHUNKYKNIT

(See Page 11 for Instructions)

A striking variation of the Fishermans Rib in Chunkyknit. The basque is neat and narrow, the collar wide and delightfully casual.

We recommend using wooden toggles as illustrated for buttons for that added touch of smartness.

The "wrong side" stitch of this design is also very appealing of you may even prefer to "knit" in reverse.

Page 9

# DESIGN No. 1170 PEACOCK FASHION FLECK

(Illustrated on Page 8)

MATERIALS REQUIRED: 20 (22-23-26) Balls.

1 pair No. 6 needles and 1 set of 4 No. 10 needles.

MEASUREMENTS: Length from top of shoulder 23" (23½"-24"-24½").

Bust and Chest 34" (36"-38"-40").

Length of sleeve seam 17½" (18"-18"-20")

**TENSION:**  $4\frac{1}{2}$  sts. 1".  $6\frac{1}{2}$  rows 1".

BACK: Using No. 10 needles, cast on 80 (84-88-92) sts. Work in rib of K2, P2 for 1½". Change to No. 6 needles and work in st. st. When work measures 15" (15"-15"-15"), shape raglan armholes as follows:—

**1st Row:** (K1, P1) twice, K2 tog., K to last 6 sts., sl. 1, K1, p.s.s.o., (P1, K1) twice.

2nd Row: (P1, K1) twice, P to last 4 sts. (K1, P1) twice.

Repeat the last 2 rows until decreased to 34 (34-36-36) sts.

**Next Row:** Work 15 (15-15-15) sts., cast off loosely 4 (4-6-6) sts., work 15 (15-15-15) sts.

Next Row: (K1, P1) twice, K2 tog., K to end. Next Row: Cast off 4 (4-4-4) sts., work to end. Repeat the last 2 rows twice.

Join wool and work other side to correspond.

FRONT: Work the same as for back.

**SLEEVES:** Using No. 10 needles, cast on 48 (48-52-56) sts. Work in rib of K2, P2 for 3". Change to No. 6 needles and work in st. st., increasing 1 st. each end of every 8th row until increased to 66 (70-74-78) sts. When sleeve seam measures  $17\frac{1}{2}$ " (18"-18"-20") or required length, shape the raglan top the same as for back until decreased to 14 (14-16-16) sts. Cast off loosely.

NECKBAND: Join sleeves to back and front. With right side of work towards you, using 4 No. 10 needles, pick up and K about 124 (124-136-136) sts. around neck. Work in rounds in rib of K2, P2 for 1½". Cast off loosely in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Sew up side and sleeve seams.



# -DESIGN No. 923-

(Illustrated Opposite)

# HUGHES TWINPRUFE DOUBLE CREPE OR **HUGHES KOOBA FINGERING**

MATERIALS REQUIRED: Double Crepe: 10 (12) Balls.

Kooba: See notes on equivalents, Page 3. 1 pair No. 9 needles and 1 set of 4 No. 12

MEASUREMENTS: Length from top of shoulder 23\frac{3}{4}" (24\frac{1}{4}"); Chest 38" (42").

TENSION, 61 sts., 1". 10 rows, 1".

BACK: Using No. 12 needles, cast on 120 (126) sts. Work in rib of K2, P2 for 3½". Change to No. 9 needles, increase 6 (14) sts. evenly across row. 126 (140) sts. Work in following pattern:—

1st Row: \* P2, K12, repeat from \* to end. 2nd Row: \* P12, K2, repeat from \* to end. 3rd Row: K1, \* P2, K12, repeat from \* to

last 13 sts., P2, K11. 4th Row: P11, \* K2, P12, repeat from \* to

last 3 sts., K2, P1.
5th Row: K2, \* P2, K12, repeat from \* to

last 12 sts., P2, K10. 6th Row: P10, \* K2, P12, repeat from \* to

last 4 sts., K2, P2. 7th Row: K3, \* P2, K12, repeat from \* to

last 11 sts., P2, K9.

8th Row: P9, \* K2, P12, repeat from \* to

last 5 sts., K2, P3. 9th Row: K4, \* P2, K12, repeat from \* to

last 10 sts., P2, K8. 10th Row: P8, \* K2, P12, repeat from \* to last 6 sts., K2, P4.

11th Row: K5, \* P2, K12, repeat from \* to last 9 sts., P2, K7.

12th Row: P7, \* K2, P12, repeat from \* to last 7 sts., K2, P5.

13th Row: K6, \* P2, K12, repeat from \* to last 8 sts., P2, K6.

14th Row: P6, \* K2, P12, repeat from \* to last 8 sts., K2, P6.

15th Row: K7, \* P2, K12, repeat from \* to last 7 sts., P2, K5.

16th Row: P5, \* K2, P12, repeat from \* to

last 9 sts., K2, P7.
17th Row: K8, \* P2, K12, repeat from \* to

last 6 sts., P2, K4. 18th Row: P4, \* K2, P12, repeat from \* to last 10 sts., K2, P8.

19th Row: K9, \* P2, K12, repeat from \* to last 5 sts., P2, K3.

20th Row: P3, \* K2, P12, repeat from \* to last 11 sts., K2, P9.

21st Row: K10, \* P2, K12, repeat from \* to last 4 sts., P2, K2.

22nd Row: P2, \* K2, P12, repeat from \* to last 12 sts., K2, P10.

23rd Row: K11, \* P2, K12, repeat from \* to last 3 sts., P2, K1.

24th Row: P1, \* K2, P12, repeat from \* to last 13 sts., K2, P11.

25th Row: \* K12, P2, repeat from \* to end. 26th Row: \* K2, P12, repeat from \* to end. 27th Row: P1, \* K12, P2, repeat from \* to last st., P1.

28th Row: K1, \* P12, K2, repeat from \* to last st., K1.

These 28 rows complete the pattern. Continue in pattern and when work measures 14" (14"), shape armholes by casting off 7 (10) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 5 (5) rows, then every 2nd row 5 (5) times. When armholes measure 94" (104"), shape shoulders by casting off 10 (12) sts. at the beginning of the next 2 rows. Cast off 10 (11) sts. at the beginning of the next 4 rows. Cast off.

FRONT: Work the same as for back until armholes measure  $5\frac{1}{2}$ " (6").

Next Row: Work 37 (41) sts., (leave on a spare needle), cast off 18 (18) sts., work to end.

Continue on last 37 (41) sts. and K2 tog. at neck edge of the next 4 (4) rows, then every 2nd row until decreased to 30 (34) sts. When armhole measures 93" (104"), shape shoulder by casting off 10 (12) sts. at the armhole edge of the next row. Cast off 10 (11) sts. at armhole edge every 2nd row twice. Join wool at neck edge and work other side to correspond.

With ARMBANDS: Join shoulder seams. right side of work towards you, using No. 12 needles, pick up and K about 160 (168) sts. around armholes. Work in rib of K2, P2 for Cast off in ribbing.

NECKBAND: Using 4 No. 12 needles, pick up and K 152 (156) sts. around neck. Work in rounds in rib of K2, P2 for 1". Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Sew up seams.



# -DESIGN No. 977-

HUGHES TWINPRUFE 4 PLY
MATERIALS REQUIRED: 12 (13-14) Balls.
1 pair No. 10 needles and 1 set of 4 No.
12 needles.

MEASUREMENTS: Length from top of shoulder 23¾" (24"-24¾"). Chest 38" (40"-42"). Length of sleeve seam 19" (20"-20").

**TENSION:** 7 sts., 1". 9 rows, 1".

BACK: Using No. 12 needles, cast on 124 (130-140) sts. Work in rib of K1, P1 for 3½". Change to No. 10 needles, P 1 row on wrong side increasing 13 (16-15) sts. evenly across row. 137 (146-155) sts. Work as follows:—

1st Row: P3, \* K5, P4, repeat from \* to last 8 sts., K5, P3.

2nd Row: K3, \* P5, K4, repeat from \* to last 8 sts., P5, K3.

3rd Row: P3, \* pick up and K loop between sts., K1, P3 tog., K1, pick up loop between sts. and place on left-hand needle, then K into back of it, P4, repeat from \* ending with P3 instead of P4.

4th Row: Repeat 2nd row.

Repeat these 4 rows and when work measures  $13\frac{1}{2}$ "  $(13\frac{1}{2}$ "- $13\frac{1}{2}$ "), shape raglan armholes by casting off 3 (4-6) sts. at the beginning of the next 2 rows. Decrease 1 st. each end of every 2nd row until decreased to 35 (38-39) sts. Cast off.

FRONT: Work the same as for back until work measures  $13\frac{1}{2}$ "  $(13\frac{1}{2}$ "  $-13\frac{1}{2}$ ").

Next Row: Cast off 3 (4-6) sts., work 64 (69-70) sts., K2 tog. for 1st and 3rd sizes only, (leave remaining sts. on a spare needle).

Continue on these 65 (69-71) sts. and decrease 1 st. at neck edge every 5th row 17 (19-19) times, at the same time, decrease 1 st. at armhole edge every 2nd row until all sts. are decreased. Join wool at centre front and work to end.

Next Row: Cast off 3 (4-6) sts., work to end. Continue as for other side.

SLEEVES: Using No. 12 needles, cast on 70 (72-76) sts. Work in rib of K1, P1 for 3".

Change to No. 10 needles, P 1 row on wrong side, increasing 4 (2-7) sts. evenly across row. 74 (74-83) sts. Work in pattern, increasing 1 st. each end of every 8th row until increased to 102 (108-115) sts. When sleeve seam measures 19" (20"-20") or required length, cast off 3 (4-6) sts. at the beginning of the next 2 rows. Decrease 1 st. each end of every 2nd row until all sts. have been decreased.

NECKBAND: Join sleeves to back and fronts. With right side of work towards you, using 4 No. 12 needles, pick up and K about 200 (208-212) sts. around neck. Work in rounds in rib of K1, P1 for 1", decreasing 1 st. each side of "V" every round. Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Sew up side and sleeve seams.





# -DESIGN No. 985-

HUGHES KWICKNIT OR HUGHES BOUCLE

MATERIALS REQUIRED:

Kwicknit: 19 (22-23) Balls.

Boucle: See note on equivalents, Page 3. 1 pair No. 8 needles and 1 set of 4 No. 12 needles.

MEASUREMENTS: Length from top of shoulder  $23\frac{3}{4}$ " (24"- $24\frac{1}{4}$ "). Chest 38" (40"-42"). Length of sleeve seam 19" (20"-20").

**TENSION:**  $5\frac{1}{2}$  sts., 1".  $7\frac{1}{2}$  rows, 1".

BACK: Using No. 12 needles, cast on 104 (110-116) sts. Work in rib of K1, P1 for 3½". Change to No. 8 needles, increase 1 st. and work in pattern as follows:—

**1st Row:** K3, \* P1, K1, P1, K3, repeat from \* to end.

2nd Row: P4, \* K1, P5, repeat from \* to last 5 sts., K1, P4.

3rd Row: Repeat 1st row.

4th Row: K1, P1, K1, \* P3, K1, P1, K1, repeat from \* to end.

5th Row: K1, P1, \* K5, P1, repeat from \* to last st., K1.

Repeat 4th, 5th, 4th, 3rd and 2nd rows. Those 10 rows complete the pattern. Continue in pattern and when work measures 15" (15"-15"), shape armholes by casting off 5 (5-6) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 4 (5-6) rows. When armholes measure 8\frac{3}{4}" (9"-9\frac{1}{4}"), shape shoulders by casting off 10 (10-10) sts. at the beginning of the next 2 rows. Cast off 9 (10-10) sts. at the beginning of the next 4 rows. Cast off.

FRONT: Work the same as for back to armholes.

Next Row: Cast off 5 (5-6) sts., work 46 (49-51) sts., K2 tog., (leave remaining sts. on a spare needle).

Continue on last 47 (50-52) sts. and K2 tog. at neck edge every 4th row, at the same time, K2 tog. at armhole edge of the next 4 (5-6) rows. K2 tog. at neck edge every 4th row until decreased to 28 (30-30) sts. When armhole measures 8¾" (9"-9¼"), shape shoulder by casting off 10 (10-10) sts. at the armhole edge of the next row. Cast off 9 (10-10) sts. at armhole edge every 2nd row twice. Join wool at neck edge and work other side to correspond.

SLEEVES: Using No. 12 needles, cast on 56 (60-62) sts. Work in rib of K1, P1 for 3". Change to No. 8 needles, increase 1 (3-1) sts. and work in pattern as for back, increasing 1 st. each end of every 8th row until increased to 85 (87-91) sts. When sleeve seam measures 19" (20"-20"), K2 tog. each end of every 2nd row until decreased to 63 (63-63) sts., then every row until decreased to 27 (27-27) sts. Cast off.

NECKBAND: Join shoulder seams. With right side of work towards you, using 4 No. 12 needles, pick up and K about 166 (170-174) sts. around neck. Work in rib of K1, P1 for 1", decreasing 1 st. each side of "V" every round. Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Sew sleeves around armholes. Sew up seams.

# **-DESIGN** No.

(Illustrated on Back Cover)

### HUGHES BULKYKNIT

MATERIALS REQUIRED: 22 (25) Balls. 1 pair No. 6 needles and 1 set of 4 No. 10 needles.

MEASUREMENTS: Length from top of shoulder 22" (24"). Chest 36" (40"). Length of sleeve seam 18" (20").

**TENSION:** 6 sts., 1". 6 rows, 1".

BACK: Using No. 10 needles, cast on 100 (120) sts. Work in rib of K1, P1 for 3". Change to No. 6 needles, P1 row on wrong side increasing 8 (2) sts. 108 (122) sts. Work as follows:-

1st Row: K1, P1, K1, (wl. fwd., K2 tog., K1, P1, K1, P1, K1) 3 (4) times, P2, K6, P2, (K1, P1, K1, P1, K1, wl. fwd., K2 tog.) 5 times, K1, P1, K1, P1, K1, P2, K6, P2, (K1, P1, K1, P1, K1, wl. fwd., K2 tog.) 3 (4) times, K1, P1, K1.

2nd Row: P1, K1, P1, (w.r.n., P2 tog., P1, K1, P1, K1, P1) 3 (4) times, K2, P6, K2, (P1, K1, P1, K1, P1, w.r.n., P2 tog.) 5 times, P1, K1, P1, K1, P1, K2, P6, K2, (P1, K1, P1, K1, P1, w.r.n., P2 tog.) 3 (4) times, P1, K1, P1.

Repeat 1st and 2nd rows twice.

7th Row: K1, P1, K1, (wl. fwd., K2 tog., K1, P1, K1, P1, K1) 3 (4) times, P2, sl. next 3 sts. on to a spare needle and leave in front, K3, K the 3 sts. from spare needle (this will be termed "cable 6"), P2, (K1, P1, K1, P1, K1, wl. fwd., K2 tog.) 5 times, K1, P1, K1, P1, K1, P2, cable 6, P2, (K1, P1, K1, P1, K1, wl. fwd., K2 tog.) 3 (4) times, K1, P1, K1.

8th Row: Repeat 2nd row. Repeat these 8 rows and when work measures 14" (15"), shape armholes by casting off 4 (6) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 4 (6) rows. When armholes measure 8" (9"), shape shoulders by casting off 9 (10) sts. at the beginning of the next 6 (6) rows. Cast off remaining sts. loosely.

FRONT: Work the same as for back until armholes measure  $5\frac{1}{4}$ " ( $6\frac{1}{4}$ ").

Next Row: Work 39 (42) sts., (leave on a spare needle), cast off loosely 14 (14) sts., work 39

(42) sts.

Continue on last 39 (42) sts. and K2 tog. at neck edge of the next 8 rows, then every 2nd row until decreased to 27 (30) sts. When armhole measures 8" (9"), shape shoulder by casting off 9 (10) sts. at armhole edge every 2nd row 3 (3) times. Join wool at neck edge and work other side to correspond.

SLEEVES: Using No. 10 needles cast on 50 (50) sts. Work in rib of K1, P1 for 3". Change to No. 6 needles, P1 row on wrong side increasing 8 (8) sts. 58 (58) sts. 1st Row: K1, P1, K1, (wl. fwd., K2 tog., K1,

P1, K1, P1, K1) 3 times, P2, K6, P2, (K1, P1, K1, P1, K1, wl. fwd., K2 tog.) 3 times, K1, P1, K1.

2nd Row: P1, K1, P1, (w.r.n., P2 tog., P1, K1, P1, K1, P1) 3 times, K2, P6, K2, (P1, K1, P1, K1, P1, w.r.n., P2 tog.) 3 times, P1, K1, P1. Repeat 1st and 2nd rows twice.

7th Row: K1, P1, K1, (wl. fwd., K2 tog., K1, P1, K1, P1, K1) 3 times, P2, cable 6, P2, (K1, P1, K1, P1, K1, wl. fwd., K2 tog.) 3 times, K1, P1, K1.

8th Row: Repeat 2nd row increasing 1 st. each end of row.

Repeat these 8 rows increasing 1 st. each end of every 6th (4th) row until increased to 86 (98) sts. When sleeve seam measures 18" (20") or required length, K2 tog. each end of every 2nd row until decreased to 66 (66) sts., then every row until decreased to 20 (20) sts. Cast off.

NECK: Join shoulder seams. With right side of work towards you, using 4 No. 10 needles, pick up and K about 112 (116) sts. around neck. Work in rounds in rib of K1, P1 for 5". Cast off loosely in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Stitch sleeves around armholes. Sew up side and sleeve seams.

# **BLEND NUMBERS**

When purchasing your wool, please note the BLEND NUMBER, which should be kept as a permanent record should you require extra wool. The BLEND NUMBER is shown on a yellow ticket included with every 1-lb. packet. (Do not confuse the the SHADE NUMBER with BLEND NUMBER.)

Even when purchasing all your wool at once, this is a wise precaution as it assures that wool taken from a second package is automatically checked, thus preventing accidental purchase of two different BLENDS.

# -DESIGN NO. 951-(Illustrated Opposite) **HUGHES BOUCLE** OR HUGHES KWICKNIT MATERIALS REQUIRED. Boucle: 18 (19-20-21) Balls. Trim Double Crepe: 4 (4-4-5) Balls.

Kwicknit: See notes on equivalents, Page

2 pairs needles Nos. 8 and 12. 20" cardi-

gan zipper. MEASUREMENTS: Length from top of

shoulder  $23\frac{3}{4}$ " (24"- $24\frac{1}{4}$ "- $24\frac{1}{2}$ "). Chest 38" (40"-42"-44"). Length of sleeve seam 19"  $(20''-20''-20\frac{1}{2}'')$ .

**TENSION:**  $5\frac{1}{2}$  sts., 1".  $7\frac{1}{2}$  rows, 1".

the next 8 (6-6-8) rows. Cast off.

BACK: Using No. 12 needles and Double Crepe wool, cast on 106 (112-118-124) sts. Work in rib of K1, P1 for  $3\frac{1}{2}$ ". Change to No. 8 needles and Boucle wool. Work in st.st. and when work measures 15" (15"-15"-15"), shape armholes by casting off 4 (5-6-5) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 3 (3-4-5) rows, then every 2nd row 3 (3-4-5) times. When armholes measure  $8\frac{3}{4}$ " (9"- $9\frac{1}{4}$ "- $9\frac{1}{2}$ "), shape shoulders by casting off 7 (10-10-8) sts. at the beginning of

# FREE! Booklet of latest Hughes styles—fill in this coupon and post to: Advertising Dept.,

F. W. Hughes, 30 Grosvenor Street, Sydney, N.S.W.

Please send me a free Hughes Style Guide for 1959. Name.....

Address.....

**RIGHT FRONT:** Using No. 12 needles and Double Crepe wool, cast on 60 (62-66-68) sts.

Work in rib of K1, P1 for 3½". Change to No. 8 needles and Boucle wool, increase 1 st. for 2nd and 4th sizes only. 60 (63-66-69)

1st Row: (Right side) K3, P1, K to end.

2nd Row: P to last 4 sts., K1, P3.

sts. Work as follows:-

Repeat these 2 rows until work measures 15" (15"-15"-15"). Cast off 4 (5-6-5) sts. at armhole edge of the next row. K2 tog. at armhole edge of the next 3 (3-4-5) rows, then every 2nd row 3 (3-4-5) times. When armhole measures 5" (5"-5"-5"), cast off 4 (4-4-4) sts. at neck edge of the next row. K2 tog. at neck edge every 2nd row until decreased to 28 (30-30-32) sts. When armhole measures  $8\frac{3}{4}$ "  $(9''-9\frac{1}{4}''-9\frac{1}{2}'')$ , shape shoulder by casting off 7 (10-10-8) sts. at armhole edge every 2nd row 4 (3-3-4) times.

**LEFT FRONT:** Work to correspond with right front, working facing at opposite end.

SLEEVES: Using No. 12 needles and Double Crepe wool, cast on 56 (58-60-62) sts. Work in rib of K1, P1 for 3". Change to No. 8 needles and Boucle wool.

Work in st.st., increasing 1 st. each end of every 6th row until increased to 88 (90-92-94) sts. When sleeve seam measures 19" (20"-20"-20½"), K2 tog. each end of every 2nd row until decreased to 60 (60-60-60) sts., then every row until decreased to 30 (30-30-30) sts. Cast off.

COLLAR: Using No. 12 needles and Double Crepe wool, cast on 48 (48-50-50) sts. Work in rib of K1, P1, casting on 2 sts. at the beginning of every row until increased to 136 (136-142-142) sts. Work 2 rows, then cast off 2 sts. at the beginning of every row until decreased to 48 (48-50-50) sts. Cast off.

TO MAKE UP: Press with a warm iron and damp cloth. Join shoulder seams. Stitch sleeves around armholes. Sew up side and sleeve seams. Fold back the 3 facing sts. down each front and sl. st. back on to wrong side, continuing hem down to lower edge of ribbing. Stitch collar on right side of neck then fold in half and stitch back on to wrong side. Sew zipper into front opening.


Published with all rights reserved by F. W. Hughes Industries Ltd., 30 Grosvenor Street, Sydney, and printed by Mockridge, Bulmer Pty. Ltd., 259 Penshurst Street, Willoughby, N.S.W.

5



# Hughes

FEATURING MENS DESIGNS

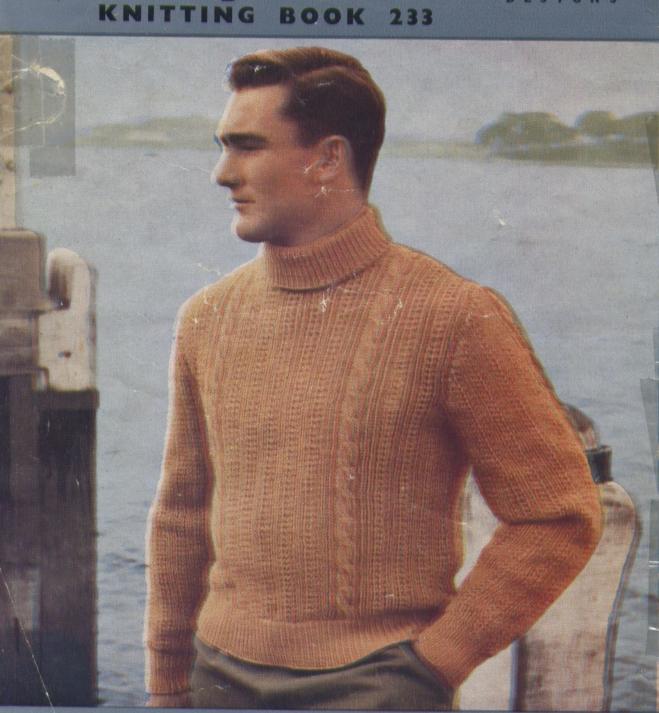

BOUCLE, KWICKNIT, BULKYKNIT, KOOBA TWINPRUFE Double Crepe, Crochet, 4 Ply & ORLON

PRICE: 1/9